

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 32 TOWNSHIP 16 RANGE 5

DATE: 7-19-02 11-20-07

PARTY CHIEF: Kiste Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 7-8-01

IN. S.P.C. E ZONE NAD '83

NAME: 16053201

N: 504999.8656(m)

E: 70642.3119(m)

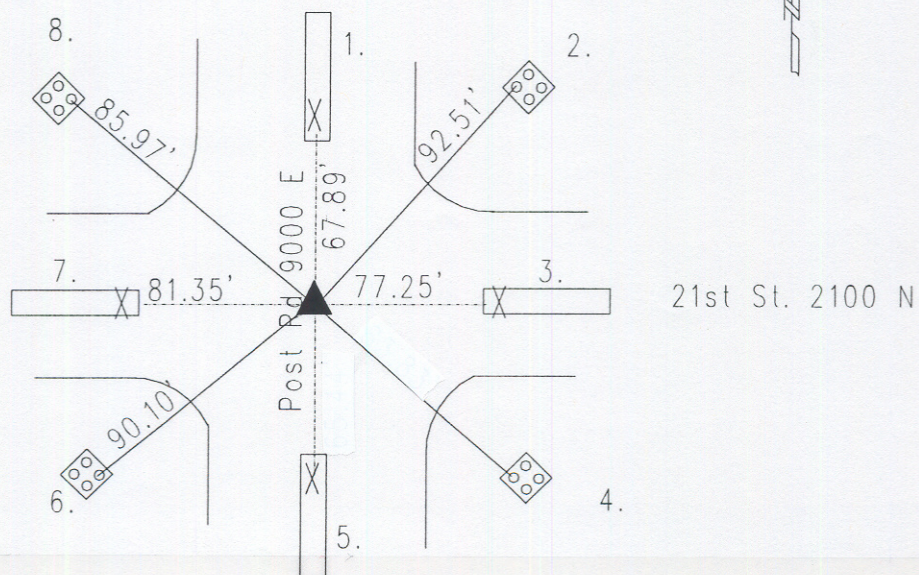

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 16" elm bearing south 69 degrees, thence west 13 links, and a 12" beech bearing north 47 degrees, thence east 4 links. (M.C. Atlas p. 15) A survey by D.B. Hasbrook on March 28, 1853 indicates no stone but the following witnesses: 10" sugar bearing north 23 degrees, thence west 36 links; and a 48" ash bearing south 39 degrees, thence east. (Warren Legal Book p. 14) Corner referenced by M.C.S. on 6/7/48 and called a stone. Corner referenced by Burres on 6/17/48 and called a brass pin. Corner referenced by Baden on 8/4/55 and called a brass pin. Corner referenced by Schmidt on 7/17/61 and called a brass pin. Corner referenced by Burres on 8/22/63 and called a brass pin. Corner referenced by Burres on 8/19/64 and called a brass pin. Corner referenced by Straber on 12/12/71 and called a boat spike. Corner referenced by Howe on 2/15/73 and called a boat spike. Corner referenced by Wilcoxon on 12/9/75 and called a brass plug. Corner referenced by Bruer on 9/20/79 and called a brass plug. Corner referenced by Gries on 8/3/88 and called a brass plug. Corner referenced by Wilcoxon on 10/8/96 and called a brass plug. Corner referenced by Whiteside on 7/8/2000 and called a brass plug. Corner excavated by Whiteside on 7/19/2002 and a #205 cast iron Harrison Monument was set in position per GPS coordinates.

16053201

| REF. | DISTANCE | DESCRIPTION |
|------|----------|--|
| 1. | 67.89' | Due N cut 'x' in median |
| 2. | 92.51' | Cut 'x' in westerly bolt of signal pole base |
| 3. | 77.25' | Due E cut 'x' in median |
| 4. | 83.79' | Cut 'x' in westerly bolt of signal pole base |
| 5. | 65.39' | Due S cut 'x' in median |
| 6. | 90.10' | Cut 'x' in easterly bolt of signal pole base |
| 7. | 81.35' | Due W cut 'x' in median |
| 8. | 85.97' | Cut 'x' in easterly bolt of signal pole base |
| | | |
| | | |
| | | |